


SUBMARIN CABLE, INOX AISI-316

[EN] Cable pulling grip for underwater cables, with two eyes without thimble, made of stainless steel AISI-316 **[D]** Kabelziehstrumpf mit zwei Schlaufen zum Verlegen von Seekabeln, aus INOX AISI-316 (NIROSTA) gefertigt **[E]** Malla tiracables para los cables submarinos, con doble lazo sin dedales, fabricado en acero inoxidable AISI-316 **[F]** Chaussette tire-câbles pour les câbles sous-marins, avec a boucle double sans cosse cœur, construction en acier inoxydable AISI-316 **[I]** Calza tiracavi per cavi sottomarini, con due asole senza redancia, realizzate in acciaio INOX AISI-316

art.	ø mm	L mm	L ₁ mm				n.		[mm]	kg
XPC065080IN	65-80	2100	1800	13.000 daN	6	3,0 mm		133	12 x 150	3,0
XPC080100IN	80-100	2500	2200	13.000 daN	6	3,0 mm		133	12 x 200	4,0
XPC100120IN	100-120	2700	2400	17.000 daN	8	3,0 mm		133	18 x 200	6,0
XPC120140IN	120-140	3200	2800	30.000 daN	8	4,0 mm		133	22 x 250	12,0
XPC140170IN	140-170	3900	3500	50.000 daN	10	4,0 mm		133	30 x 300	22,0
XPC170200IN	170-200	4500	4000	60.000 daN	12	4,0 mm		133	36 x 300	30,0

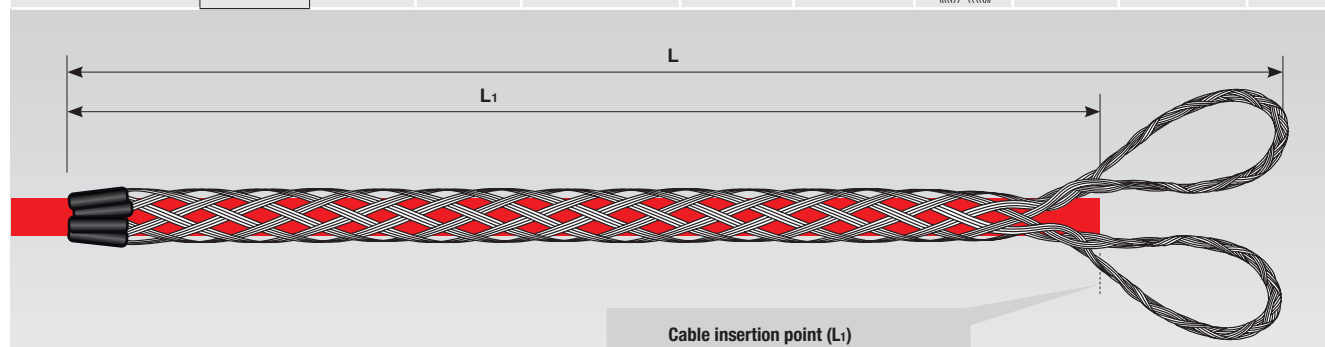

Cable insertion point (L₁)
Einschublänge des Kabels (L₁)
Punto inserción cable (L₁)
Point d'insertion de câble (L₁)
Punto infilaggio cavo (L₁)

