













**FLEXIBLE, SHORT**

**[EN]** Cable pulling grip with two eyes and thimble, laterally open, including two closing wires **[D]** Kabelziehstrumpf mit zwei Kauschen, seitlich offen mit zwei Bindelitzen **[E]** Malla tiracables con doble lazo y dedales, con un lado abierto y dos hilos de coser **[F]** Chaussette tire-câbles a lacet, avec boucle double et cosse coeur, ouvert latéralement **[I]** Calza tiracavi con due asole con redancia, lateralmente aperta con due fili di legatura

art.	ø mm	L mm	L <sub>1</sub> mm				n.			kg
XLA10/015	10-15	750	600	1.400 daN	4	1,25 mm		19	14 x 24	0,19
XLA15/020	15-20	750	600	2.800 daN	5	1,50 mm				
XLA20/025	20-25	900	700	4.000 daN	5	1,50 mm		19	14 x 24	0,42
XLA25/045	25-45	900	700	4.500 daN	6	1,50 mm				
XLA45/060	45-60	1000	800	4.500 daN	6	1,50 mm		19	15 x 29	0,60
XLA60/080	60-80	1100	900	6.200 daN	6	1,50 mm				
XLA80/100	80-100	1250	1000	16.000 daN	8	2,00 mm		19	19 x 32	1,50
XLA100/140	100-140	1450	1200	20.000 daN	10	2,00 mm				

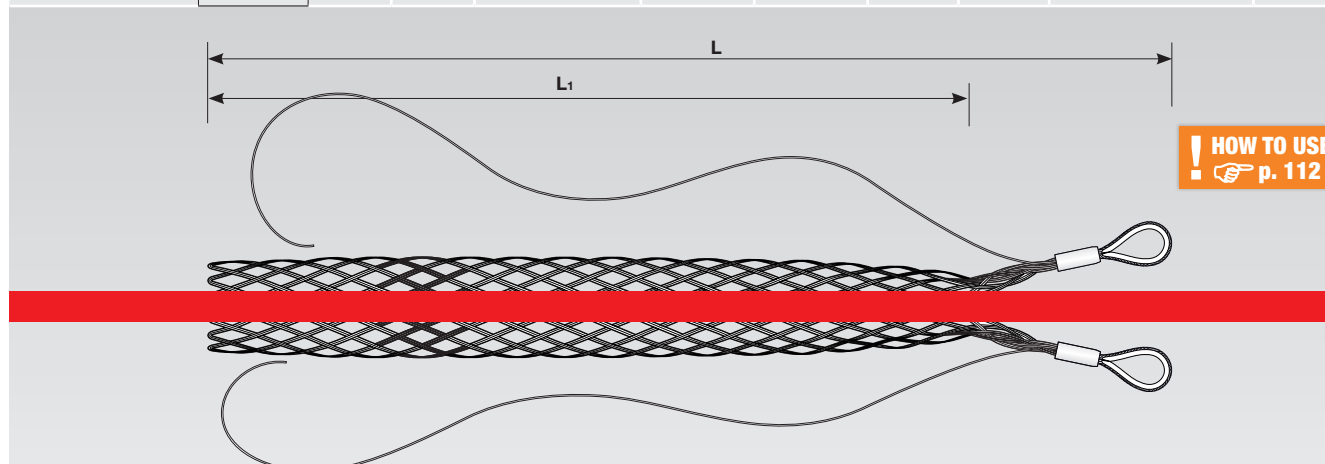

**HOW TO USE**  
p. 112

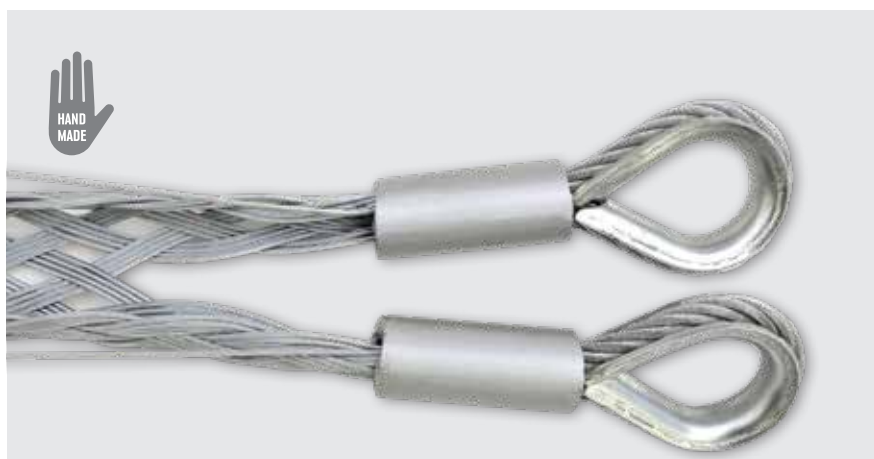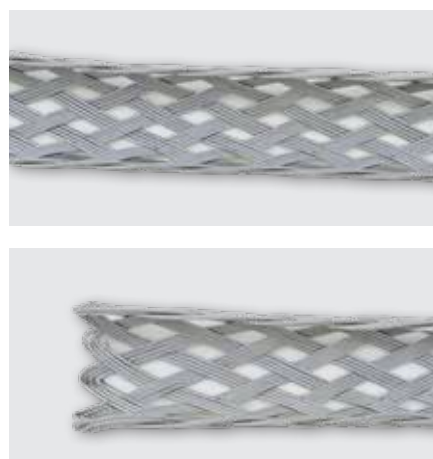

Subject to technical changes without prior notice. Technische Änderungen vorbehalten. Sujeto a variaciones técnicas sin previo aviso. Sujet à des modifications techniques sans préavis. Soggetto a variazioni tecniche senza preavviso