



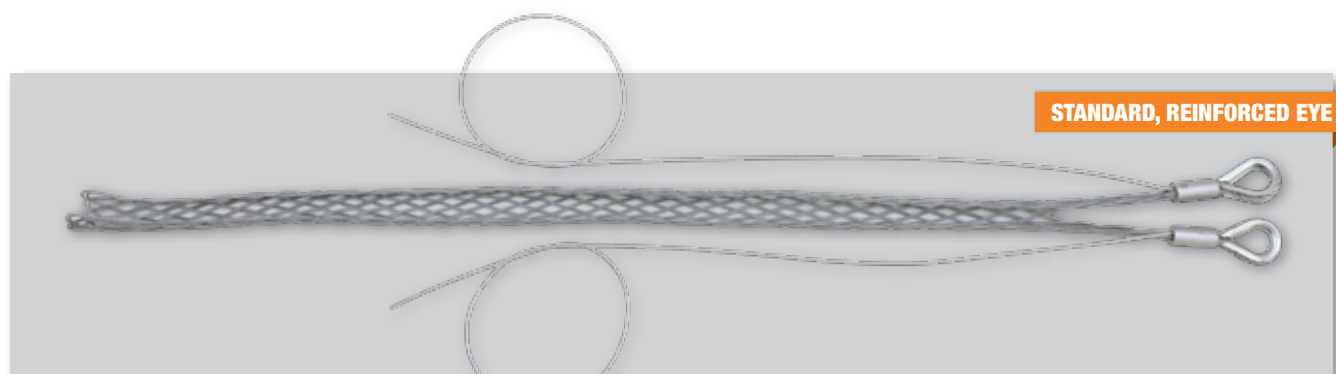

STANDARD, REINFORCED EYE

[EN] Cable pulling grip with two eyes and thimble, laterally open, including two closing wires [D] Kabelziehstrumpf mit zwei Kauschen, seitlich offen mit zwei Bindelitzen [E] Malla tiracables con doble lazo y dedales, con un lado abierto y dos hilos de coser [F] Chaussette tire-câbles a lacet, avec boucle double et cosse coeur, ouvert latéralement [I] Calza tiracavi con due asole con redancia, lateralmente aperta con due fili di legatura

art.	ø mm	L mm	L ₁ mm				n.			kg
JST312/15	10-15	1450	1250	3.000 daN	5	1,50 mm		7	14 x 24	0,36
JST312/20	15-20	1450	1250	3.000 daN	5	1,50 mm		7	14 x 24	0,38
JST312/30	20-30	1450	1250	3.000 daN	5	1,50 mm		7	14 x 24	0,43
JST312/40	30-40	1450	1250	3.500 daN	6	1,50 mm		7	14 x 24	0,46
JST312/50	40-50	1450	1250	3.500 daN	6	1,50 mm		7	14 x 24	0,50
JST312/60	50-60	1450	1250	3.500 daN	6	1,50 mm		7	14 x 24	0,54
JST312/70	60-70	1500	1250	4.100 daN	7	1,50 mm		7	15 x 29	0,56
JST312/80	60-80	1500	1250	4.700 daN	8	1,50 mm		7	15 x 29	0,59
JST312/80	70-80	1500	1250	4.700 daN	8	1,50 mm		7	15 x 29	0,60
JST312/90	80-90	1500	1250	4.700 daN	8	1,50 mm		7	15 x 29	0,64
JST312/100	80-100	1550	1250	9.400 daN	8	2,00 mm		7	15 x 29	0,67
JT312/100	90-100	1550	1250	9.400 daN	8	2,00 mm		7	18 x 32	1,00
JST312/110	90-110	1550	1250	9.400 daN	8	2,00 mm		7	18 x 32	1,00
JT312/110	100-110	1550	1250	11.000 daN	10	2,00 mm		7	18 x 32	1,15
JST312/120	100-120	1550	1250	11.000 daN	10	2,00 mm		7	18 x 32	1,20
JT312/120	110-120	1550	1250	11.000 daN	10	2,00 mm		7	18 x 32	1,25
JST312/130	120-130	1550	1250	11.000 daN	10	2,00 mm		7	21 x 38	1,32
JST312/150	120-150	1550	1250	11.000 daN	10	2,00 mm		7	21 x 38	1,38
JST312/140	130-140	1550	1250	14.000 daN	12	2,00 mm		7	21 x 38	1,44
JT312/150	140-150	1550	1250	14.000 daN	12	2,00 mm		7	21 x 38	1,50

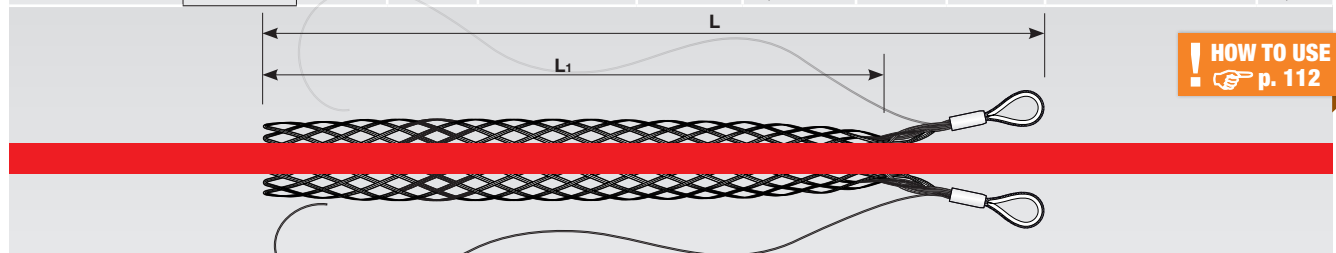

! HOW TO USE
p. 112

