


STANDARD, REINFORCED EYE



[EN] Cable pulling grip with single eye and thimble, long version [D] Kabelziehstrumpf lang, mit einer Kausche [E] Malla tiracables con un lazo y dedal
[F] Chaussette tire-câbles à boucle simple avec cosse coeur, version longue [I] Calza tiracavi lunga, con un'asola e redancia

art.	ø mm	L mm	L ₁ mm				n.			kg
									$\begin{matrix} H \\ D \\ H \times D \\ [mm] \end{matrix}$	
JST115/15	10-15	1600	1500	3.000 daN	5	1,50 mm				0,38
JST115/20	15-20	1600	1500	3.000 daN	5	1,50 mm				0,41
JST115/30	20-30	1600	1500	3.000 daN	5	1,50 mm				0,45
JST115/40	30-40	1600	1500	3.500 daN	6	1,50 mm				0,50
JST115/50	40-50	1600	1500	3.500 daN	6	1,50 mm				0,54
JST115/60	50-60	1600	1500	3.500 daN	6	1,50 mm				0,57
JST115/70	60-70	1600	1500	4.100 daN	7	1,50 mm				0,62
JST115/080	60-80	1600	1500	4.700 daN	8	1,50 mm				0,63
JST115/80	70-80	1600	1500	4.700 daN	8	1,50 mm				0,64
JST115/90	80-90	1600	1500	4.700 daN	8	1,50 mm				0,67
JST115/100	80-100	1600	1500	9.400 daN	8	2,00 mm				0,71
JT115/100	90-100	1600	1500	9.400 daN	8	2,00 mm				1,05
JST115/110	90-110	1600	1500	9.400 daN	8	2,00 mm				1,05
JT115/110	100-110	1650	1500	11.000 daN	10	2,00 mm				1,10
JST115/120	100-120	1650	1500	11.000 daN	10	2,00 mm				1,15
JT115/120	110-120	1650	1500	11.000 daN	10	2,00 mm				1,21
JST115/130	120-130	1650	1500	11.000 daN	10	2,00 mm				1,27
JST115/150	120-150	1650	1500	11.000 daN	10	2,00 mm				1,31
JST115/140	130-140	1650	1500	14.000 daN	12	2,00 mm				1,35
JT115/150	140-150	1650	1500	14.000 daN	12	2,00 mm				1,40

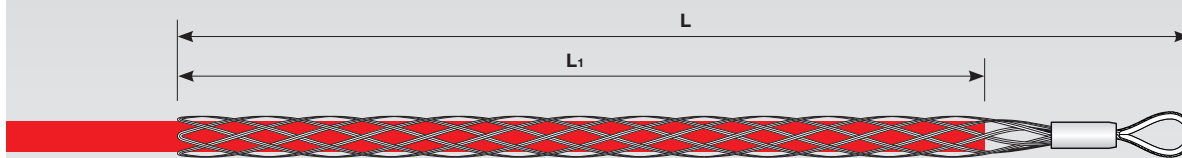

Subject to technical changes without prior notice. Technische Änderungen vorbehalten. Soggetto a variazioni tecniche senza preavviso. Sujet à des modifications techniques sans préavis. Soggetto a variazioni tecniche senza preavviso.