



DYNEEMA®, SUPER-STRONG

[EN] Cable pulling grip with two eyes, construction by Dyneema® wires [D] Kabelziehstrumpf mit zwei Schlaufen, gefertigt aus Dyneema®-Seil
[E] Malla tiracables con doble lazo, construcción en hilos de Dyneema® [F] Chaussette tire-câbles a boucle double, construction en fils de Dyneema®
[I] Calza tiracavi con 2 asole, costruzione in fili di Dyneema®

art.	ø mm	L mm	L ₁ mm				n.		kg
XDY5065	50-65	1850	1600	15.000 daN	5	4,0 mm	2	12 x 250	0,80
XDY6580	65-80	2000	1700	25.000 daN	6	4,0 mm	3	16 x 250	1,50
XDY80100	80-100	2100	1800	25.000 daN	6	4,0 mm	3	16 x 250	1,60
XDY100120	100-120	2400	2000	35.000 daN	8	4,0 mm	3	20 x 300	2,30
XDY120140	120-140	3000	2500	45.000 daN	8	4,0 mm	3	26 x 350	3,50
XDY140170	140-170	3800	3300	50.000 daN	9	4,0 mm	4	30 x 350	5,50
XDY170210	170-210	4600	4000	70.000 daN	12	4,0 mm	4	32 x 400	7,30
XDY210240	210-240	5200	4500	85.000 daN	12	4,0 mm	4	38 x 500	10,50

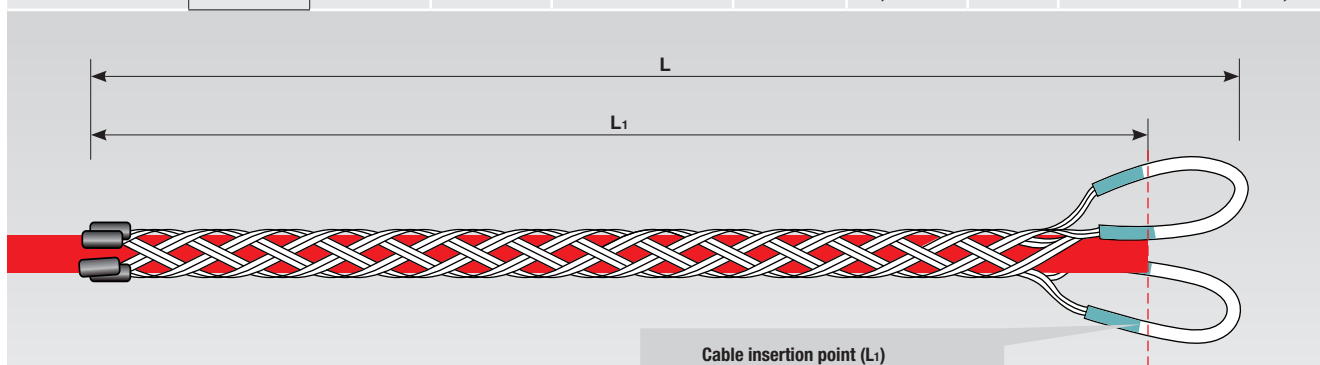

Cable insertion point (L₁)
Einschublänge des Kabels (L₁)
Punto inserción cable (L₁)
Point d'insertion de câble (L₁)
Punto infilaggio cavo (L₁)

